
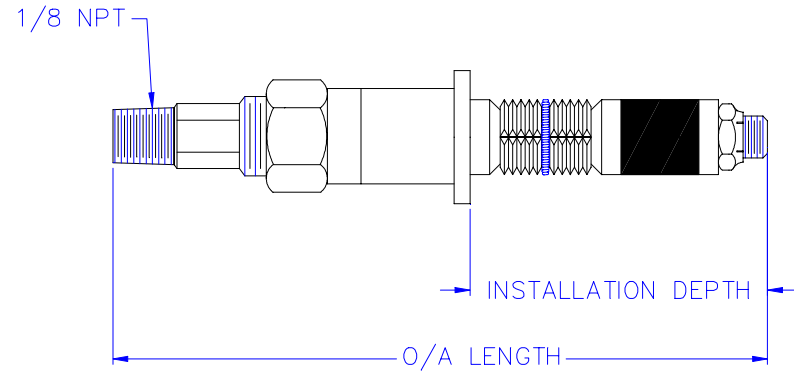


SQ2 High Pressure Test Plugs - Technical Specifications

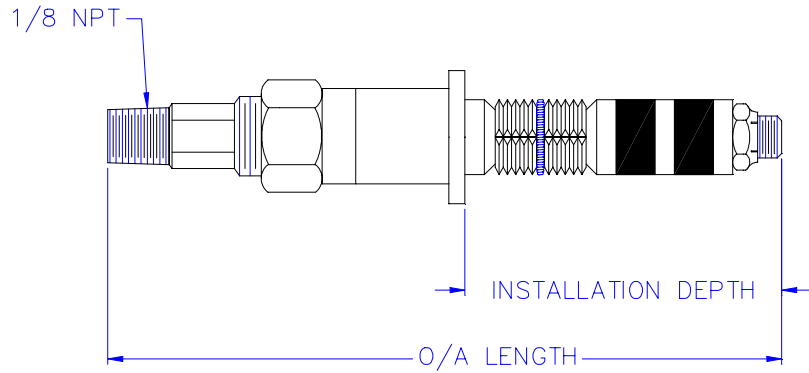

SQ2-0050 to SQ2-0060

SQ2-0062 to SQ2-0090

Part Number	I.D. Size Range				Plug O.D.		Undercut From Minimum I.D.		Std Seal Mat'l (1)	Shaft O.D. (2)		Shaft I.D.		Installation Depth		O/A Length		Max. Op. Pressure		Shaft Hex Wrench Size (in)	Hex Nut Wrench Size (in)	Approximate Shipping Weight	
	Min. (in)	Max. (in)	Min. (mm)	Max. (mm)	(in)	(mm)	(in)	(mm)		(in)	(mm)	(in)	(mm)	(in)	(mm)	(psi)	(Bar)	(in)	(mm)			(lbs)	(kgs)
SQ2-0047	0.47	0.50	11.9	12.7	0.44	11.2	0.03	0.8	U	1/2 - 1/4	12.7 - 6.4	0.11	2.8	2 3/8	60.3	5 1/16	128.6	6500	446	3/8	3/4	0.40	0.18
SQ2-0050	0.50	0.53	12.7	13.5	0.47	11.9	0.03	0.8	U	1/2 - 1/4	12.7 - 6.4	0.11	2.8	2 3/8	60.3	5 1/16	128.6	6500	446	3/8	3/4	0.40	0.18
SQ2-0053	0.53	0.56	13.5	14.2	0.50	12.7	0.03	0.8	U	1/2 - 1/4	12.7 - 6.4	0.11	2.8	2 3/8	60.3	5 1/16	128.6	6500	446	3/8	3/4	0.40	0.18
SQ2-0056	0.56	0.60	14.2	15.2	0.53	13.5	0.03	0.8	U	1/2 - 1/4	12.7 - 6.4	0.11	2.8	2 3/8	60.3	5 1/16	128.6	6500	446	3/8	3/4	0.40	0.18
SQ2-0060	0.60	0.62	15.2	15.8	0.57	14.5	0.03	0.8	U	1/2 - 1/4	12.7 - 6.4	0.11	2.8	2 3/8	60.3	5 1/16	128.6	6500	446	3/8	3/4	0.40	0.18
SQ2-0062	0.62	0.65	15.7	16.5	0.59	15.0	0.03	0.8	U	1/2 - 1/4	12.7 - 6.4	0.11	2.8	2 3/8	60.3	5 1/16	128.6	6500	446	3/8	3/4	0.40	0.18
SQ2-0065	0.65	0.68	16.5	17.3	0.62	15.7	0.03	0.8	U	1/2 - 1/4	12.7 - 6.4	0.11	2.8	2 3/8	60.3	5 1/16	128.6	6500	446	3/8	3/4	0.40	0.18
SQ2-0068	0.68	0.72	17.3	18.3	0.65	16.5	0.03	0.8	U	1/2 - 1/4	12.7 - 6.4	0.11	2.8	2 3/8	60.3	5 1/16	128.6	6500	446	3/8	3/4	0.50	0.23
SQ2-0072	0.72	0.75	18.3	19.1	0.69	17.5	0.03	0.8	U	1/2 - 3/8	12.7 - 9.5	0.13	3.3	2 3/8	60.3	5 1/16	128.6	6500	446	3/8	3/4	0.50	0.23
SQ2-0075	0.75	0.78	19.1	19.8	0.72	18.3	0.03	0.8	U	1/2 - 3/8	12.7 - 9.5	0.13	3.3	2 5/16	58.7	5 1/16	128.6	6500	446	3/8	3/4	0.50	0.23
SQ2-0078	0.78	0.81	19.8	20.6	0.75	19.1	0.03	0.8	U	1/2 - 3/8	12.7 - 9.5	0.13	3.3	2 5/16	58.7	5 1/16	128.6	6500	446	3/8	3/4	0.50	0.23
SQ2-0081	0.81	0.83	20.6	21.1	0.78	19.8	0.03	0.8	U	1/2 - 3/8	12.7 - 9.5	0.13	3.3	2 5/16	58.7	5 1/16	128.6	6500	446	3/8	3/4	0.50	0.23
SQ2-0083	0.83	0.87	21.1	22.1	0.80	20.3	0.03	0.8	U	1/2 - 3/8	12.7 - 9.5	0.13	3.3	2 5/16	58.7	5 1/16	128.6	6500	446	3/8	3/4	0.50	0.23
SQ2-0087	0.87	0.90	22.1	22.9	0.84	21.3	0.03	0.8	U	1/2 - 3/8	12.7 - 9.5	0.13	3.3	2 5/16	58.7	5 1/16	128.6	6500	446	3/8	3/4	0.60	0.27
SQ2-0090	0.90	0.93	22.9	23.6	0.87	22.1	0.03	0.8	U	1/2 - 3/8	12.7 - 9.5	0.13	3.3	2 5/16	58.7	5 1/16	128.6	6500	446	3/8	3/4	0.60	0.27

Notes:

- (1) Standard Seal Material: U = urethane
- (2) SQ2 shafts are a stepped design. The compression nut is on the larger diameter, all other components are on the smaller diameter.
- (3) Specifications subject to change without notice.



World Headquarters:
Expansion Seal Technologies
 2701 Township Line Road
 Hatfield, PA 19440-1770 USA
 Tel: 1-215-721-1100 Fax: 1-215-721-1101
 Toll-Free: 1-800-355-7044

Expansion Seal Technologies EMEA
 Hoorn 312a • 2404 HL Alphen aan den Rijn
 The Netherlands
 Tel: +31-172-418841
 Fax: +31-172 - 418849

Expansion Seal Technologies Asia Pte Ltd.
 35 Tannery Rd, #11-10 Tannery Block
 Ruby Industrial Complex
 Singapore 347740
 Tel: +65-6745-8560 Fax: +65-6742-8700

SPECIALISTS IN TUBE TESTING, SLEEVING AND PLUGGING TECHNOLOGY

AN ISO-9001 REGISTERED COMPANY